

CATALOGUE EQUIPEMENTS DE SÉCURITÉ

Standard : +226 25652835
GSM: +22670245169
WhatsApp +22678885761

contact@elecprotech.com
elecprotech@gmail.com
www.elecprotech.com



UNIOSCAN



SCANNERS |
PORTIQUES

UB500 Walk Through Metal Detector



UNIQSCAN : The Global Leader of Security Metal Detectors and Checkpoint Screening

Easy assembly: designed with only 2 pieces cables and 8 screws, simply-to-follow instruction;
Automatically count passengers and alarm times

Alarm strength indicator on control panel ;
Password protection, only the authorized person can operate.

Program Self-diagnostic when power on, no need initial or periodic calibration;
Modularization design,easy for maintenance and replacement

Harmless to human body: is harmless with heart pacemaker, pregnant women, magnetic floppy, recording tapes, etc.



Sound & LED alarm: Both Side LED indicator

18 zones, Sensitivity adjustable:
Each zone has 100 sensitivity level

Using high density fireproof material ;
Program Self-diagnostic when power on,no need initial or periodic calibration

Modularization design,easy for maintenance and replacement.

The metal detector is a leader in global safe drilling and handheld metal detection products and training. From the Olympics to international airports around the world, has reliable experience, expertise and reliable products to make your facilities or events safer.

PARAMETERS

- Gross weight: 65KG
- Power Supply: AC100V-240V
- Working temperature: -20°C--+50°C
- Working Frequency :4KHZ—8KHZ
- Standard External size: 2200mm(H)X800mm(W)X580mm(D)
- Standard Internal size: 2010mm(H)X700mm(W)X500mm(D)
- Package size for door panels: 2260*550*235mm *1ctn
- Package size for control unit: 750*340*200 mm*1ctn

USE DOMAIN



Port



Airport



Train Station



Hospital



Hotel



Factory



Government



Bank

Usage condition

UB500

Pinpoint Zone Detection

The UB500' s exclusive multiple target pinpointing with 18 zones standard shows precise target location of the body from head to toe.

Program

When the program is self-diagnostic, it does not require initial or periodic calibration, modularization design, easy for maintenance and replacement.

Installation

The UB500 design only 2 cables and 8 screws, operation instructions are simple. High density refractories are used to make the product stronger.

PRODUCT DETAILS



A. 5 Digital LED Count :Easy show & count passengers

B. 8 Screws: Easy assembly and install;

C. Socket: Easy connect both door panels;

D. Power Line : Support UK / European / USA standard;

E. Integrated Circuit Board : Intelligent circuit;

F. Infrared Sensor :Accuracy check;

G. Tamper Indication: Easy distinguish interference;

H. Foot Cover:Easy fastness;

Contact us:

Shenzhen Unisec Technology Co.,Ltd

Factory : 8/F Building F6, Juyin Science and Technology Industrial Park, No. 1 Ganli road, Jihua street, Longgang district, Shenzhen China

Tel: +086-0755-28793799 Fax: +086-0755-28791799

PRODUCT

POINT:



The UB500' s Access Control Panel is designed for use by authorized personnel with specific, multi-level security codes. It allows authorized users to change settings such as detection Program and Sensitivity. A tamper alarm sounds within 10 seconds after the Access Touchpad is pressed, unless a proper access code is entered.

PRODUCT PACKAGING



Recycling

Carton Dimension L*W*H (mm)

Door Panel : 2260*550*235 mm

Control Unit :750*340*235 mm

Gross weight :65KG

We will arrange the most suitable logistics according to the actual situation and the customer's requirements. Our packing is very tight to prevent any breakage during shipment.

UB600 METAL DETECTOR



UNIQSCAN: The Global Leader of Security Metal Detectors and Checkpoint Screening



The Uniqscan metal detector is a leader in global safe drilling and handheld metal detection products and training. From the Olympics to international airports around the world, Uniqscan has reliable experience, expertise and reliable products to make your facilities or events safer.

PARAMETERS

- Gross weight: 70KG
- Power Supply: AC85v - 264 v
- Working temperature: -20°C---+50°C
- Working Frequency :4KHZ—8KHZ
- Standard External size: 2200mm(H)X800mm(W)X580mm(D)
- Standard Internal size: 2010mm(H)X700mm(W)X500mm(D)
- Package size for door panels: 2290*560*180mm *1ctn
- Package size for control unit: 760*380*260 mm*1ctn

USE DOMAIN



Port



Airport



Train Station



Hospital



Hotel



Factory



Government



Bank

Usage condition

UB600

Pinpoint Zone Detection

The Uniqscan' s exclusive multiple target pinpointing with 6/12/18 zones standard shows precise target location on the left, center and right side of the body from head to toe.

Entry Pacing Lights

Smooth, efficient traffic flow with easy-to-view, eye-level pacing lights with international "wait" and "proceed" symbols on the entrance side of each panel.

Floor Mounting Option

The UB600 can be mounted using the optional Adhesive Floor Mounting Kit , which can be used to protect valuable flooring surfaces while preventing unit movement.

PRODUCT DETAILS



A. 6 Digital LCD Screen Count :Easy show & count a large number of passengers

B. 8 Screws: Easy assembly and install;

C. Socket: Easy connect both door panels;

D. Power Line : Support UK / European / USA standard;

E. Integrated Circuit Board : Intelligent circuit;

F. Infrared Sensor :Accuracy check;


G. Remote Control:Easy operate the machine;

H. Foot Cover:Easy fastness;

SECURITY EQUIPMENT:

X-ray Baggage Scanner
Dual View X-ray Baggage Scanner
Walk Through Metal Detector
Hand Held Metal Detector
Under Vehicle Insepection Camera
Under Vehicle Surveillance System
Explosives Trace Detection

PRODUCT POINT:

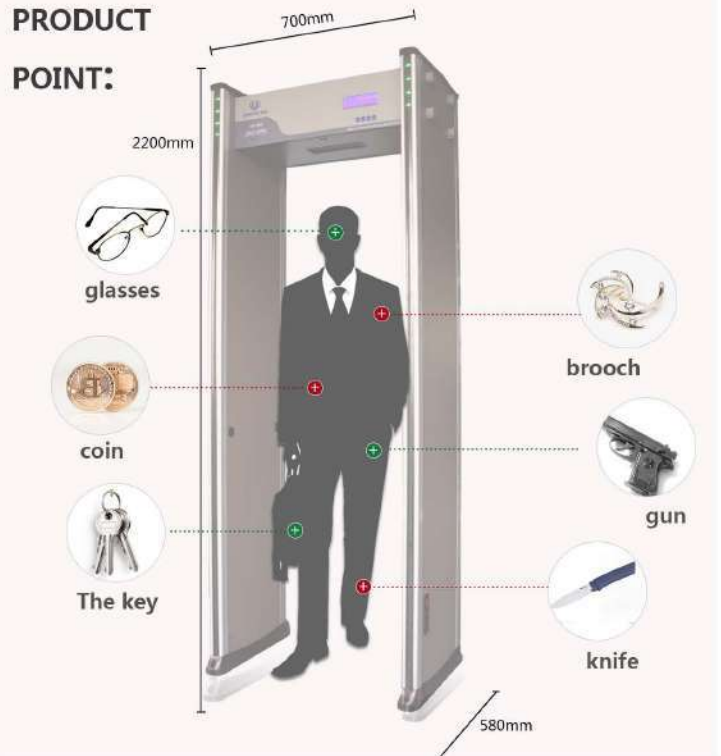

The UB-600' s Access Control Panel is designed for use by authorized personnel with specific, multi-level security codes. It allows authorized users to change settings such as detection Program and Sensitivity. A tamper alarm sounds within 10 seconds after the Access Touchpad is pressed, unless a proper access code is entered.

PRODUCT PACKAGING



Recycling


Carton Dimension L*W*H (mm)
Door Panel : 2290*560*180 mm
Control Unit :760*380*260 mm
Gross weight :70KG

We will arrange the most suitable logistics according to the actual situation and the customer's requirements. Our packing is very tight to prevent any breakage during shipment.

UB800 METAL DETECTOR



UNIQSCAN: The Global Leader of Security Metal Detectors and Checkpoint Screening

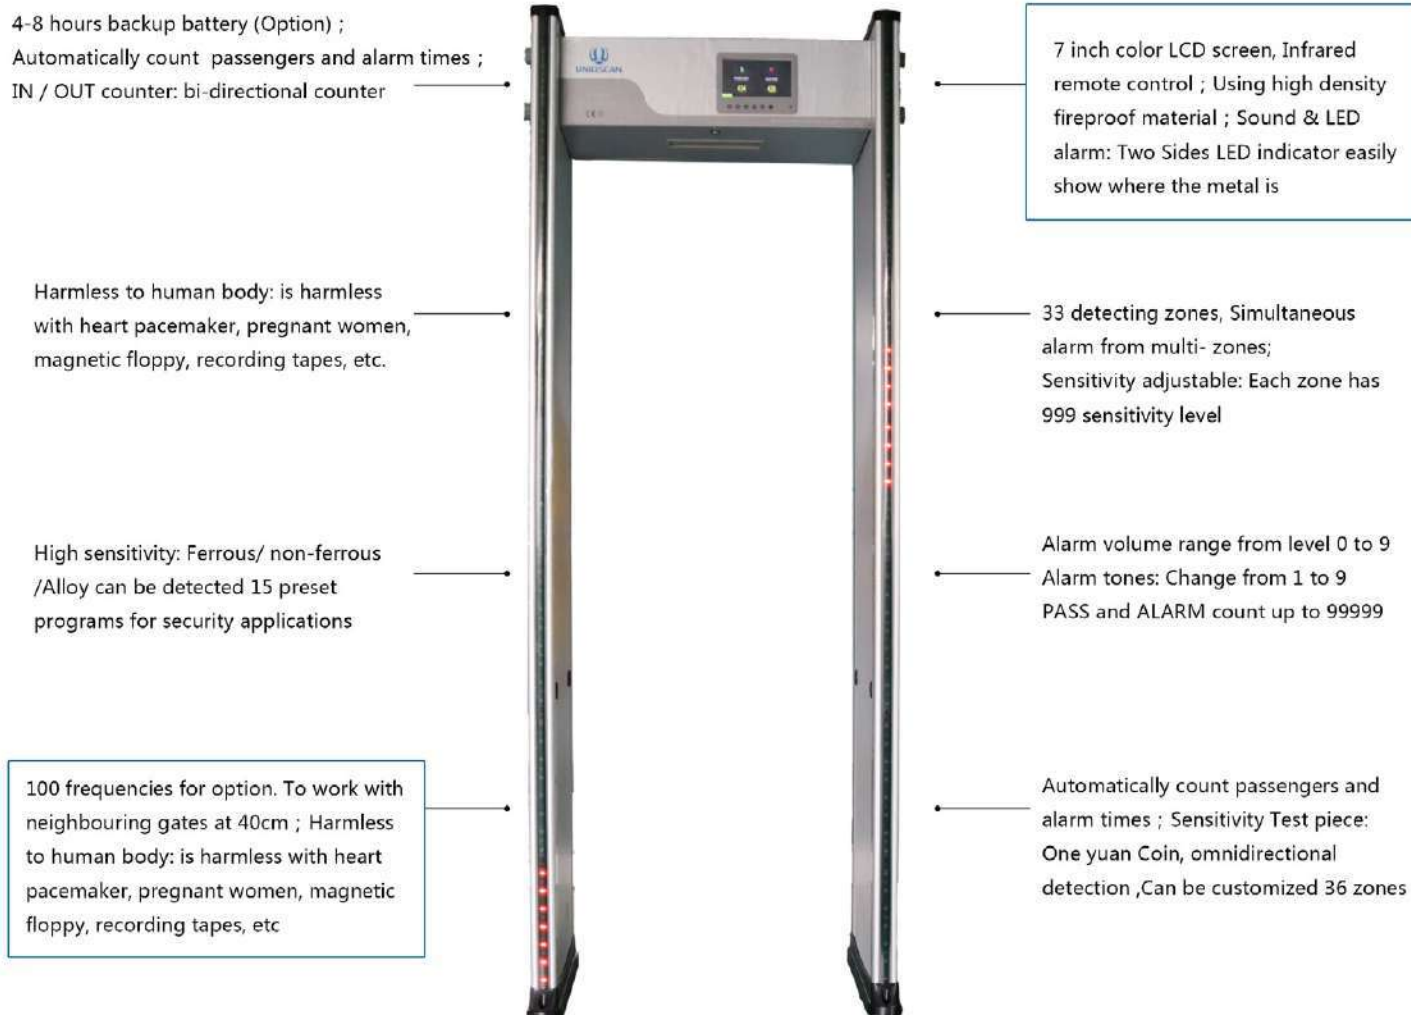

The Uniqscan metal detector is a leader in global safe drilling and handheld metal detection products and training. From the Olympics to international airports around the world, Uniqscan has reliable experience, expertise and reliable products to make your facilities or events safer.

PARAMETERS

- Gross weight: 65KG
- Power Supply: AC100V-240V / 50-60Hz ; Power <30W
- Working temperature:-30°C--+70°C
- Working : Waterproof can be used outside
- Package size for door panels: 2270*560*180mm *1ctn
- Package size for control unit: 750*370*260mm*1ctn
- Standard External size: 2230mm(H)X835mm(W)X580mm(D)
- Standard Internal size: 1990mm(H)X700mm(W)X500mm(D)

USE DOMAIN



Port



Airport



Train Station



Hospital



Hotel



Factory



Government



Bank

www.uniqscan.com

Usage condition

UB800

Pinpoint Zone Detection

The Uniqscan' s exclusive multiple target pinpointing with 33/36 zones standard shows precise target location on the left, center and right side of the body from head to toe.

Entry Pacing Lights (Option)

Smooth, efficient traffic flow with easy-to-view, eye-level pacing lights with international "wait" and "proceed" symbols on the entrance side of each panel.

Floor Mounting Option

The UB 800 can be mounted using the optional Adhesive Floor Mounting Kit , which can be used to protect valuable flooring surfaces while preventing unit movement.

PRODUCT DETAILS



- A. 7 Inch Color LCD Screen:** Easy show and operate;
- B. 8 Screws:** Easy assembly and install;
- C.Socket:** Easy connect both door panels;
- D. Power Line :** Support UK / European / USA standard;
- E. Integrated Circuit Board :** Intelligent and Stably
- F.Infrared Sensor :**Accuracy check;
- G. Backup Battery:** Support 4-8 hours (Option);
- H. Foot Cover:**Easy fastness

Contact us:

Shenzhen Unisec Technology Co.,Ltd
 Factory : 3/F Building A1, Fenghuang Industrial Park,
 Fenghuang Road, Pinghu Street Longgang District,
 Shenzhen China
 Tel: +086-0755-28793799 Fax: +086-0755-28791799

PRODUCT POINT:



The UB-800' s Access Control Panel is designed for use by authorized personnel with specific, multi-level security codes. It allows authorized users to change settings such as detection Program and Sensitivity. A tamper alarm sounds within 10 seconds after the Access Touchpad is pressed, unless a proper access code is entered.

PRODUCT PACKAGING



Recycling

Carton Dimension L*W*H (mm)
 Door Panel : 2290*560*180
 Control Unit :760*380*260
 Net weight : 62KG
 Gross weight :65KG
 Volume:0.32cbm/pcs

We will arrange the most suitable logistics according to the actual situation and the customer's requirements. Our packing is very tight to prevent any breakage during shipment.

SF5030A X-RAY BAGGAGE SCANNER



UNIQSCAN: 12 years original manufacturer of X-ray baggage scanner in China



GENERAL SPECIFICATIONS:

- Tunnel Size : 500 (W) ×300 (H) mm
- Conveyor Speed: 0.22m/s
- Conveyor Max Load: 150 kg
- L-shaped array detector, 24bit;
- Single inspection dosage: < 1.32μGy
- Wire Resolution: 38AWG
- Steel Penetration: 10mm
- Film Safety: For ISO 1600

Uniqscan is a 12 years original manufacturer of X-ray baggage scanner and metal detector in China, good quality and perfect after-sales service. For all customer, we provide OEM,ODM and Customized service.

X-RAY GENERATOR

1. Orientation: Upward;
2. Tube Current: 0.4~0.7MA (adjustable) ;
3. Anode voltage: 80KV (adjustable) ;
4. X-ray divergence angle: 60 °;
5. Generator cooling/working periods:sealed oil bath with forced air/100%;

ABOUT US



We owns all of the intellectual property rights (IPR) to its core technologies ,and have a experience engineer team with senior x-ray detection exports, signal and imagine processing specialist . Our excellent technical developing capacity to support us are ability to have continuesly new production lines.

www.uniqscan.com

OPERATING ENVIRONMENT :

- ◆ Storage Temperature: -20°C to 60°C
- ◆ Operating Temperature: 0°C to 45°C
- ◆ Relative Humidity: 20 to 95% non-condensing
- ◆ System Power: 220 VAC (±10%) 50±3HZ
- ◆ Power wastage: 1.0 KW (Max)
- ◆ Noise < 65DB



IMAGE PERFORMANCE SYSTEM

- A:** X-ray sensor---L type photodiode array detector (energy), 24 bi depth ;
- B:** Display---High-resolution liquid crystal display, 24-bit color ;
- C:** Color management architectures---Different color, different matter ;
- D:** Inverse, white/black/colorized---For compare these images to find the suspected dangerous goods;
- E:** To eliminate organic, Inorganic out---In view of the most important image;
- F:** Edge enhancement---The edge of image is more clear ;
- H:** High penetration---Make the image more through, for look every goods in one image ;
- I:** Zoom in/zoom out---Make the image bigger ,make the image smaller ;
- J:** 1 times size of image---Make image back to 1 times size of image;
- K:** Brighter/darker---Make image more bright /make image darker ;
- L:** Replay---Playback all images on the screen at current , be able to do the next steps ;

APPLICATION AND CERTIFICATIONS

- Used for scenic spots, gymnasium, expo centre, left- baggage counter, supermarket, hotel ,court, prison..etc;
- Machine parts safeguard measures;
- High performance network function;
- Chinese ministry of public security testing;
- EU CE Certification;
- ISO9001 Certification;
- ISO14001 Environmental Management;
- Radiation safety certification from China Government;

DIMENSION DRAWING:

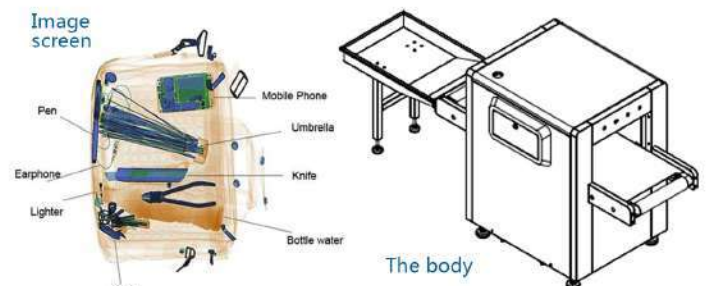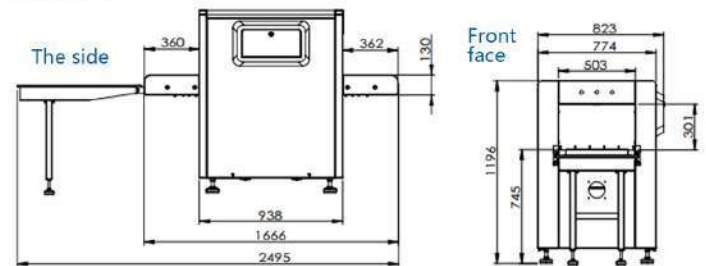

SF5030A X-ray safety detection equipment can display pseudo color and black and white images, with simple and efficient operation, with reasonable human design. We provide a fully intelligent and secure inspection system for our customers.

ACCESSORIES :



X-Ray generator(80KV)
Brand: KV Tech (Beijing)



Detection board
Brand: DT (Finland)



Automatic
Brand: Emerson in USA



Philips 19 inch



Roller
Brand: NSK(Japan)



Power supply
Brand: Meanwell

CONTACT US :

Shenzhen Unisec Technology Co.,Ltd

Factory : 3/F Building A1, Fenghuang Industrial Park,
Fenghuang Road, Pinghu Street Longgang District,
Shenzhen China

Tel: +086-0755-28793799 Fax: +086-0755-28791799



BARRIERES
DE SECURITE

Hydraulic Road Blocker



Technical Parameter

Control System:	Integrated Electro- Hydraul;
Passing pressure:	≤80- 120 tons container trucks;
Voltage:	AC220V 50Hz Integrated;
System Dynamic power:	350W Integrated;
Rise time:	≤3-4S (adjustable) ;
fall time :	≤3-4S (adjustable) ;
Material:	304 stainless steel;
Rising height:	600mm;
Diameter:	168mm,219mm,273mm (can be customized);
External housing size:	430*430*1130mm/500*500*900mm ;
Thickness of bollard:	6mm,8mm,10mm.12mm,15mm,30mm (optional);
Working Temperature:	-35°C~75°C (suitable) ;
Storage Environment:	10°C~65°C, Waterproof and moisture-proof;
Solenoid valve voltage:	24V;
Remote control distance:	Approx .50m-100m
Waterproof:	IP68, double sealed;
Running noise:	≤60 db;
Weight:	I200 KG approx.

Application :

Important place 、 Checkpoint 、
anti-terrorist area 、 an use with traffic
light 、 parking barriers together.



Main Function:

- Structure : With load-bearing steel beam column, anti-collision steel beam column, 4 navigation rod;
- Integrated electrical mechanism : stroke 600mm,Cylinder outer diameter 60mm,Rod diameter:16mm;
- 6k Mirror cylinder;
- Colorful With LED (Acrylic light circle) ;
- Reflective sticker :2 strips ;
- Gang-control interface ;
- Can be manually fall down if power cut ;
- Available to reverse operation during rising or falling down ;
- Hydraulic drive comes with hydraulic lock ;
- PLC programming command control system ;
- LCD display ,Both Chinese and English menu ;
- PLC built-in encryption system .

Case:



Hydraulic Road Blocker



Technical Parameter

Control System :	Electro- Hydraulic
Passing pressure :	≤120 tons container trucks;
System Dynamic power :	3.75KW;
Rise time :	≤1-3S (adjustable) ;
fall time :	≤1-3S (adjustable) ;
Buffer function :	buffer time :0.2s-0.5s;
Running noise :	≤60 db;
Voltage :	Three-phases 380V, (control voltage 24V) ;
Oil container :	60liter;
Control solenoid valve :	24V;
Lifting solenoid valve :	24V;
Remote control distance :	Approx .50-100m;
Working Temperature :	-35°C~75°C (suitable) ;
Material :	A3 steel , Spray anti-rust paint;
Material thicknes :	16mm,20 mm,25 mm (Optional) ;
Waterproof :	IP68, double sealed;
LED light color :	red,blue,green,white...(customized);
Color :	red,blue,green,yellow...(can be customized);
Weight :	1.5T.

Application :

Important place 、 Checkpoint 、
anti-terrorist area 、 an use with traffic
light 、 parking barriers together.



side



Standard Road blocker size : (mm)

L2000*W1000*H760,Rising height : 500 (Customized)

L2500*W1000*H760,Rising height : 500 (Customized)

L3000*W1000*H760,Rising height : 500 (Customized)

L3500*W1000*H760,Rising height : 500 (Customized)

L4000*W1000*H760,Rising height : 500 (Customized)

L4500*W1000*H760,Rising height : 500 (Customized)

L5000*W1000*H760,Rising height : 500 (Customized)

L5500*W1000*H760,Rising height : 500 (Customized)

L6000*W1000*H760,Rising height : 500 (Customized)

Main Function



- Can be manually raised and fall down if power cut.
- Gang-control interface
- Reliable structure, heavy duty load, smooth action, low noise.
- In rising and falling, reversible operation is available .
- Hydraulic drive comes with hydraulic lock
- Welding cylinder
- PLC programming command control system
- LCD display ,Both Chinese and English menu.
- PLC built-in encryption system
- Heavy duty hydraulic cylinders : HOB63-200CA+I Stroke200
Heavy duty Industrial Level
- Double dynamic double oil pump 2.3ML/time
- Hydraulic oil hose : PT international interface , 1/2 Double
wire high pressure hose



Case:



Buried Tyre Killer

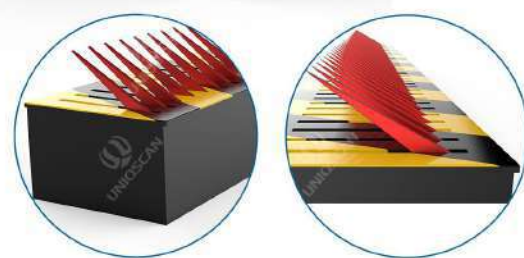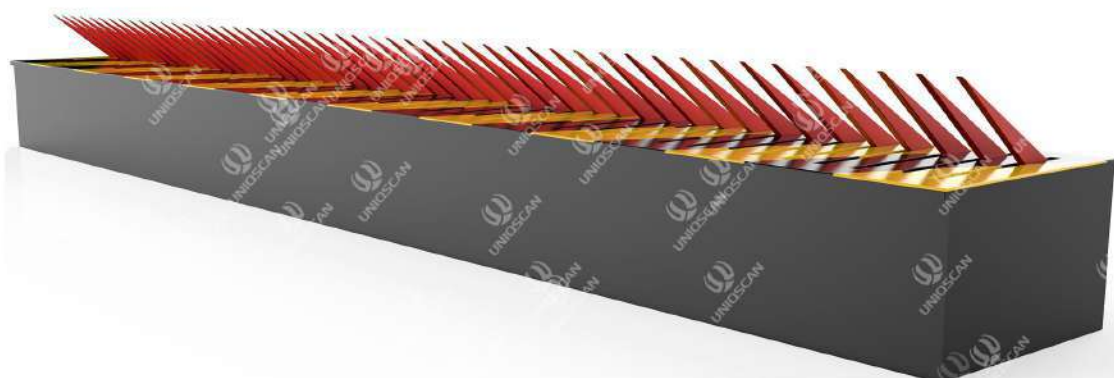


Technical Parameter

Material :	A3 Steel , with anti-rust paint;
Surface treatment :	Paint with reflective strip;
IP rate :	IP67 waterproof ;
Standard color :	Black and yellow, Customized color;
Length :	3M,4M,5M,6M Can be customized;
Width :	520mm ;
Height :	70~90mm;
Max loading weight :	80T container truck;
Spike Height :	120mm;
Spike Thickness :	10mm;
Drive mode :	Electromechanical;
Voltage :	AC220V;
System Dynamic power :	180W;
Control distance:	≤100M;
Remote control distance :	≤50M
Thickness :	12mm;
Rise time :	≤1-2S;
fall time :	≤1-2S;
Working Environment :	-40℃~+70℃;
Storage Environment :	-10℃~65℃;
Weight :	0.5T;

Application :

Important place 、 Checkpoint 、
anti-terrorist area 、 an use with traffic
light 、 parking barriers together.



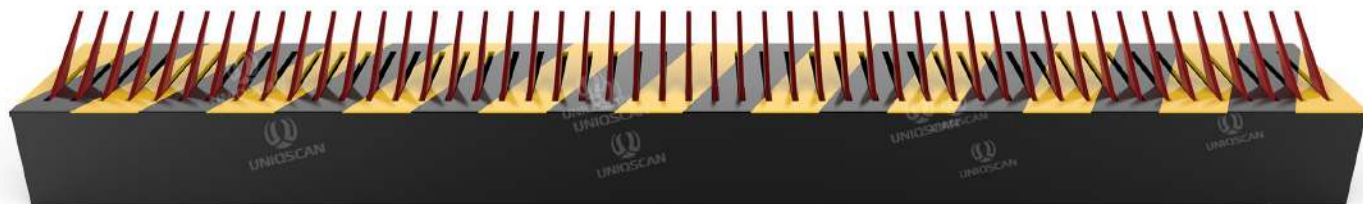

Standard size : (mm) ,can be customized

L3000*W500*H120, Rising Length: 150

L3500*W500*H120, Rising Length: 150

L4000*W500*H120, Rising Length: 150

L4500*W500*H120, Rising Length: 150

L5000*W520*H120, Rising Length: 150


L5500*W500*H120, Rising Length: 150

L6000*W500*H120, Rising Length: 150

Case:



Buried-free Tyre Killer



Technical Parameter

Material :	A3 Steel , with anti-rust paint;
Surface treatment :	Paint with reflective strip;
IP rate :	IP67 waterproof ;
Standard color :	Black and yellow, Customized color;
Length :	3M,4M,5M,6M Can be customized;
Width :	520mm ;
Height :	70~90mm;
Max loading weight :	80T container truck;
Spike Height :	120mm;
Spike Thickness :	10mm;
Drive mode :	Electromechanical;
Voltage :	AC220V;
System Dynamic power :	180W;
Control distance:	≤100M;
Remote control distance :	≤50M
Thickness :	12mm;
Rise time :	≤1-2S;
fall time :	≤1-2S;
Working Environment :	-40℃~+70℃;
Storage Environment :	-10℃~65℃;
Weight :	0.5T;

Application :

Important place 、 Checkpoint 、
anti-terrorist area 、 an use with traffic
light 、 parking barriers together.





Standard size : (mm) ,can be customized

L3000*W520*H70, Rising Length: 150

L3500*W520*H70, Rising Length: 150

L4000*W520*H70, Rising Length: 150

L4500*W520*H70, Rising Length: 150

L5000*W520*H70, Rising Length: 150


L5500*W520*H70, Rising Length: 150

L6000*W520*H70, Rising Length: 150

Case:



UT530 Series Boom Barrier Gate

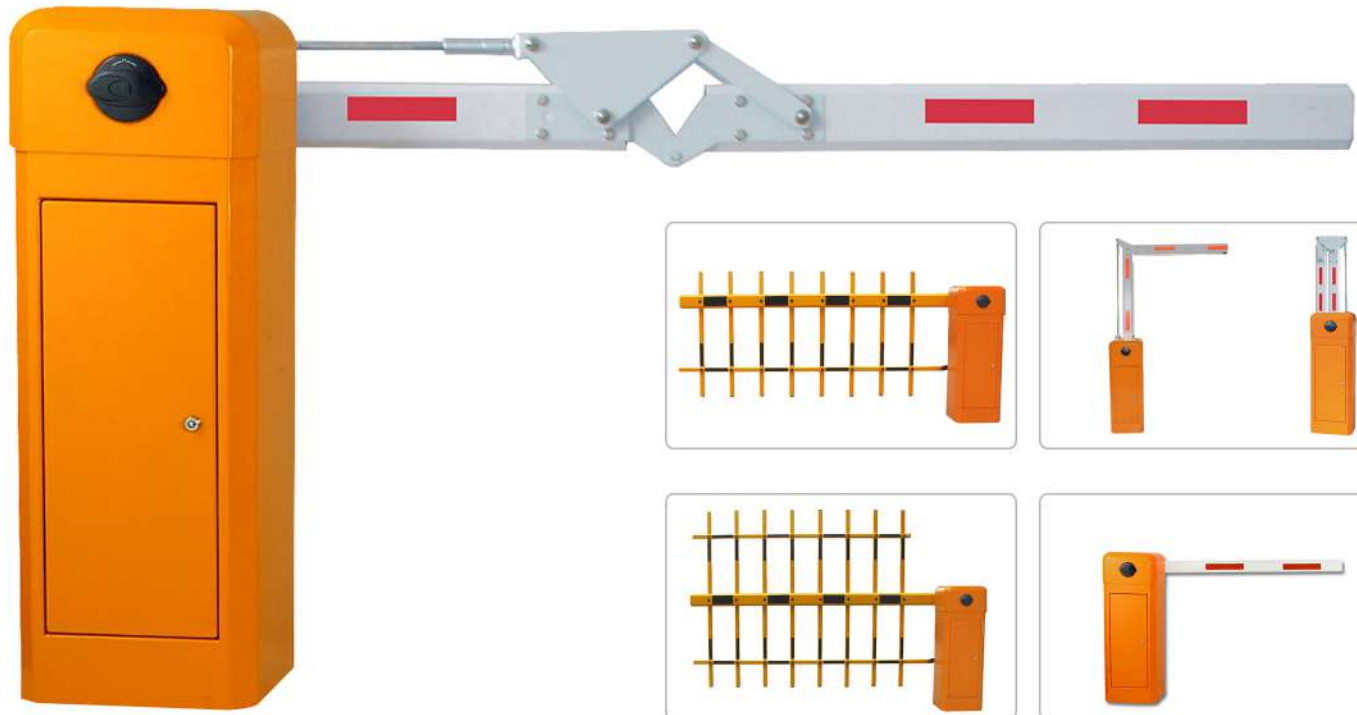


The parking gate barrier is a safe solution to stop unauthorized vehicle from accessing. They are widely used at parking lot, traffic or toll system. Users can control the parking gate barrier with remote controller or manual button, which is very convenient. It can be used in residential area, traffic control, commercial building parking lot, shopping mall parking lot, industry, hotel, toll plaza, etc.



ANTI-BUMPING

The barrier will automatically go back when meet obstacles during closing.


Optional color:



Parameters:

- Rated Voltage: AC90V~AC264V,DC24V,50/60HZ
- Speed Time: 1s,1.2s,3s,6s
- Housing Size: 340mm * 283mm * 950mm
- Remote Control Distance: ≤100 meter
- Boom Length: 3m to 6m (customized also available)
- Protection Grade: IP65
- Working Temperature: -35°C to +75°C
- Power Supply: 110V/220V±10 % 50/60HZ
- Rated Power: 120W
- Open/Close Time : 1~6s
- Net Weight: 60KG

1. Clutch key can be used to open the clutch when power off, then barrier gate can be open and close by manual easily.
2. Fan cooling machine reduce the motor temperature by high frequency using, never get heat-protecting. Unique temperature calefaction design for low temperature using, prevent freezing in cold weather.
3. Exactitude aluminum alloy die-casting motor base reduce the noise and joint abrasion to prolong the barrier gate working life.
4. Working environment: indoors and outdoors.

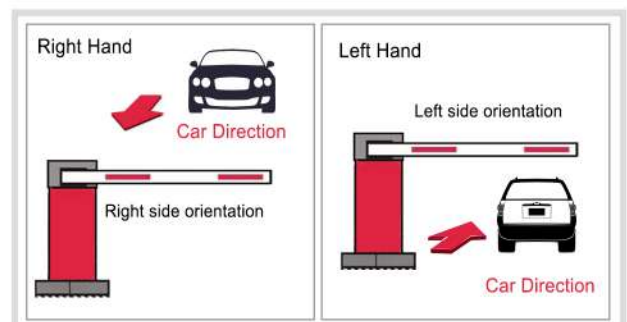

Accessories:



Better surface treatment
2mm thickness carbon steel
with smooth powder coated.



Bold spring
No bounce/jerk of boom at end
positions.




Control mainboard
Reliable and stable.



Packed with wooden box
Protect our barrier from shipping
damage.

Function introduction:

1. For security, the barrier will automatically go back when meet obstacles during closing.
2. AC motor is more powerful and no maintenance.
3. Arm can be chosen from 3 meters to 6 meters, and barrier closing time is also arranged from 1s to 6s.
4. The barrier can be installation both leftward and rightward.
5. All the operation process is soft without any noise and shaking.
6. Infrared photocell interface, Loop detector interface and IC system interface are reserved for the other functions.
7. Green light and red light are used inside for indication the position of the beam.
8. Manual release device to operate the barrier when power failure.
9. Barrier motor with die-casting aluminum alloy is high-hermetic and easy for heat dissipation.
10. Motor cooling fan to avoid the over-heating possibility.
11. Auto closing realization through menu setting on the control panel.
12. Optional housing color: yellow, orange, white, red and blue etc.
13. Variable frequency controller automatically detects and optimizes boom moving, ensures smooth moving without shake
14. System automatically self-checks operation status and reports errors code
15. Simplified design, easy installation and maintenance reduces your labor cost
16. The crank-arm linkage structure adapts to the compression spring, which can be selected to avoid accidents caused by the spring breaking.
17. Closing Priority.

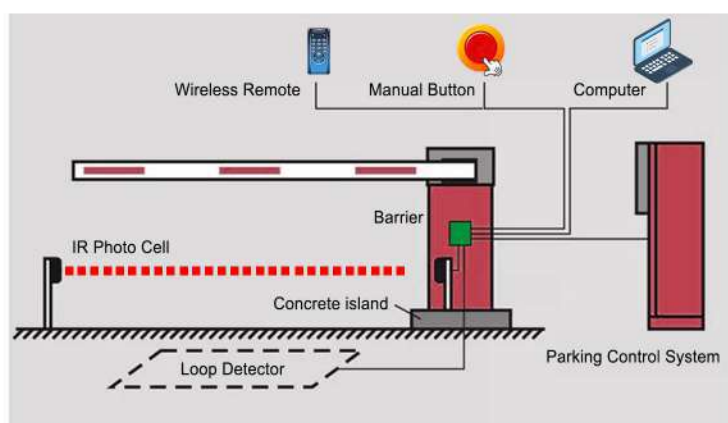

Shenzhen Unisec Technology Co.,Ltd

Factory : 3/F Building A1, Fenghuang Industrial Park,
Fenghuang Road, Pinghu Street Longgang District,
Shenzhen China



+086-0755-28793799



www.uniqscan.com



TOURNIQUETS



Tripod Turnstile:

Tripod turnstile series with innovative design, it extensive use in metro, school, office, scenic, gym, factory, residential, supermarket etc.. It can support RFID, fingerprint, facial verification mode. Combine with infrared detector, temperature controller, can widely used in all kind of different environment.

The device integrated machinery, electronics, microprocessor control and a variety of identity recognition technology. Compatible with IC card, ID card, bar code card, fingerprints and other identification equipments.



access control system



manual control



35
pers/min

CROSSING CAPACITY



≤550
mm

PASSAGE WIDTH



ANTI BUFFERING FUNCTION



ANTI-TAILING FUNCTION



BI-DIRECTIONAL



MOTORIZED



CAN BE CUSTOMIZED

Parameters:

- Size: 420*330*980mm
- Opening time: 0.2 seconds.
- Material: 304 # stainless steel
- Support force of arm: 80kg
- Delay reset time: ≥3S adjustable.
- Passing speed: ≥30 people/minute.
- Passage width: ≤550 mm
- Rod working driving force: 3Kg.
- Motor: 24V / 30W brushless.
- Positioning accuracy: 1/500 yards.
- Adaptation humidity: 5% - 90%

1. Shell processing technology: using laser, bending, cutting, welding, polishing, polishing and other processes.
2. Rod length/thickness: 500 (mm) / ϕ 38 stainless steel tube.
3. Adaptation temperature: -40 °C ~ 80 °C. (Need to add temperature control system).
4. Working environment: indoors and outdoors.

Our Advantages

- ◆ Experience factory , all size ,thickness and appearance can be customized . OEM & ODM requirments are accepted.
- ◆ Can be connected with Access control systems ,Security Checking system . And be able to provide system integration solutions.
- ◆ Strict production process and quality control, assure of our products quality .

Accessories:



304 # stainless steel




control mainboard



Motor movement



Tripod Turnstile

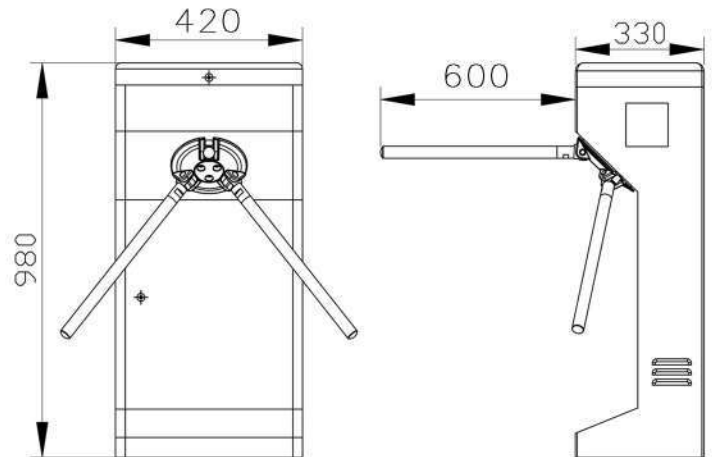

Packaging:



Function introduction:

1. The Rod unlocks quickly and reliably.
2. With power off the rod in emergency , the power on rod by hand function.
3. Entrance and exit setting : Allowed or Forbidden.
4. Customized function: Cunting function, Memory Function ,LED indicator ,Voice broadcast .
5. Can connected to standard Input and output interface.
6. Adopt High-level full-automatic intelligent mechanism ,Brushless DC motor,Anti-collision.
7. Automatical control system ,Power board,Passage LED indicator ,Passage Mode setting.
8. With power off the rod in emergency , the power automatically on rod function.
9. Using standard electrical interface, it can easily integrate magnetic stripe card, barcode card, ID card, IC card, ID card and other card readers on the device.



Use domain



Port



Airport



Train Station



Hospital



Hotel



Factory



Government



Bank

Shenzhen Unisec Technology Co.,Ltd

Factory : 3/F Building A1, Fenghuang Industrial Park,
Fenghuang Road, Pinghu Street Longgang District,
Shenzhen China



+086-0755-28793799



www.uniqscan.com



Equipment Introduction:

The device integrated machinery, electronics, microprocessor control and a variety of identity recognition technology. Compatible with IC card, ID card, bar code card, fingerprints and other identification equipments.



access control system



manual control



35
pers/min

CROSSING CAPACITY



≤550
mm

PASSAGE WIDTH



ANTI BUFFERING FUNCTION



ANTI-TAILING FUNCTION



BI-DIRECTIONAL



MOTORIZED



CAN BE CUSTOMIZED

Parameters:

- Size: 1200*280*980mm
- Opening time: 0.2 seconds.
- Material: 304 # stainless steel
- Thickness: Head: 1.5mm , Cabinet:1.2mm
- Support force of arm: 80kg
- Speed: 35 person/min
- Passage width: ≤550 mm
- Direction: Bi-directional
- Motor: 24V / 30W brushless.
- Positioning accuracy: 1/500 yards.
- Adaptation humidity: 5% - 90%

1. Shell processing technology: using laser, bending, cutting, welding, polishing, polishing and other processes.
2. Rod length/thickness: 500 (mm) / ϕ 38 stainless steel tube.
3. Adaptation temperature: -40 °C ~ 80 °C. (Need to add temperature control system).
4. Working environment: indoors and outdoors.

Our Advantages

- ◆ Experience factory , all size ,thickness and appearance can be customized . OEM & ODM requirments are accepted.
- ◆ Can be connected with Access control systems ,Security Checking system . And be able to provide system integration solutions.
- ◆ Strict production process and quality control, assure of our products quality .

Accessories:



304 # stainless steel




control mainboard



Motor movement



Tripod Turnstile

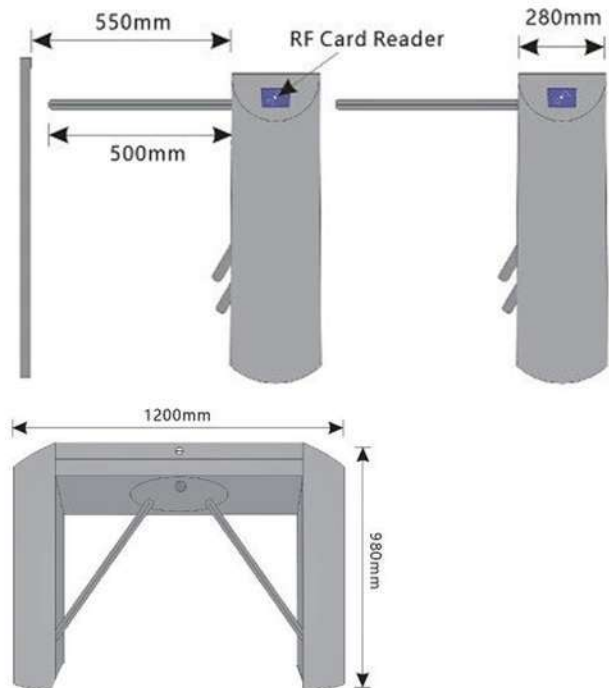

Function introduction:

1. The Rod unlocks quickly and reliably.
2. With power off the rod in emergency , the power on rod by hand function.
3. Entrance and exit setting : Allowed or Forbidden.
4. Customized function: Cunting function, Memory Function ,LED indicator ,Voice broadcast .
5. Can connected to standard Input and output interface.
6. Adopt High-level full-automatic intelligent mechanism ,Brushless DC motor,Anti-collision.
7. Automatical control system ,Power board,Passage LED indicator ,Passage Mode setting.
8. With power off the rod in emergency , the power automatically on rod function.
9. Using standard electrical interface, it can easily integrate magnetic stripe card, barcode card, ID card, IC card, ID card and other card readers on the device.



Use domain



Port



Airport



Train Station



Hospital



Hotel



Factory



Government



Bank

Shenzhen Unisec Technology Co.,Ltd

Factory : 3/F Building A1, Fenghuang Industrial Park,
Fenghuang Road, Pinghu Street Longgang District,
Shenzhen China



+086-0755-28793799



www.uniqscan.com

UT570-F Bridge Swing Turnstile



Access control system



Manual contro

The device integrated machinery, electronics, microprocessor control and a variety of identity recognition technology. Compatible with IC card, ID card, bar code card, fingerprints and other identification equipments.



35
pers/min

CROSSING CAPACITY



≤1200
mm

PASSAGE WIDTH



ANTI BUFFERING FUNCTION



ANTI-TAILING FUNCTION



BI-DIRECTIONAL



MOTORIZED



CAN BE CUSTOMIZED

Parameters:

- Size: 1200*185*980 mm
- Flap opening/closing time 0.2s
- Material: 304 # stainless steel
- Thickness: Head: 1.5mm , Cabinet: 1.2mm
- MCBF: 5 million cycles
- Speed: 35-40 person/min
- Passage width: ≤1200 mm
- Direction: Bi-directional
- Motor: 24V / 30W brushless.
- Swing arm transmission angle: 180 degrees
- Adaptation humidity: 5% - 90%

1. Shell processing technology: using laser, bending, cutting, welding, polishing, polishing and other processes.
2. Adaptation temperature: -40 °C ~ 80 °C. (Need to add temperature control system).
3. Operating environment Indoor/outdoor (Shelter)

Our Advantages

- ◆ Experience factory , all size ,thickness and appearance can be customized . OEM &ODM requirments are accepted.
- ◆ Can be connected with Access control systems ,Security Checking system . And be able to provide system integration solutions.
- ◆ Strict production process and quality control, assure of our products quality .

Accessories:



304 # stainless steel




control mainboard



Motor movement



Swing Turnstile
(acrylic board)

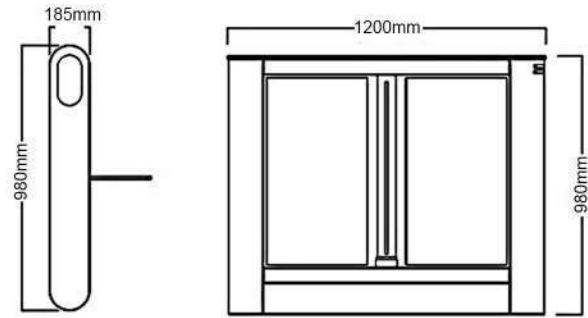


Packing



Function introduction:

1. Adopt High-level full-automatic intelligent mechanism ,Brushless DC motor, System operation stable with low noise.
2. Anti-pinch and anti-collision function, Automatical control system ,Power board, Passage LED indicator , Passage Mode setting.
3. Anti-shock function, the swing arm is automatically locked when no open signal is received.
4. The power-off the flap is automatically opened and automatically closed when it is powered, which meets the fire protection requirements.
5. with time protection and automatical reset function
6. Unified electrical interface ,Can be connected with reading and writing equipments.
7. Automatical control system ,Power board, Passage LED indicator , Passage Mode setting.
8. Using standard electrical interface, it can easily integrate magnetic stripe card, barcode card, ID card, IC card, ID card and other card readers on the device.



Use domain



Port



Airport



Train Station



Hospital



Hotel



Factory



Government



Bank

Shenzhen Unisec Technology Co.,Ltd

Factory : 8/F Building F6, Juyin Science and Technology Industrial Park, No. 1 Ganli road, Jihua street, Longgang district, Shenzhen China



+086-0755-28793799



www.uniqscan.com



DETECTEURS DE METAUX A MAIN

MD3003B1 SUPER SCANNER



UNIQSCAN® is a 11 years original manufacturer of X-ray baggage scanner in China

Portable metal detector,
convenient to take.

It can be recharged. It needs 4-6 hours for
charging. (the charger and rechargeable battery
are ordered additional)

The alarm terms is sound and light alarm
simultaneously, or vibration and light alarm
simultaneously. You can choose the operate
terms optionally.

When the low sensitivity on-off is
pressed, the metal detector will
only alarm when it finds big
metal object



Power voltage :
7.4V lithium battery,
9V Ni-MH batterie



LED light(green
light:Power Indicator;
red light:alarm

Buzzer

Li battery, USB charge cable (for
option)

Battery saving function: Automatically
power OFF after one minute if no use. (for
option)

TECHNICAL SPECIFICATIONS

- Unit Dimension: 410(L)* 85(W)* 45(H) mm
- Power voltage: standard 9V battery
- Operating voltage: 7V-9V
- Alarm Sound: $\geq 75\text{dB(A)}$
- Operating Current: $< 50\text{mA}$
- Alarm terms: sound (vibration) and light alarm
- Waterproof: IP31
- Operation Frequency: 18KHz
- Housing material: ABS- black

HIGH SENSITIVITY

- A 、 Pin: 5-10mm
- B 、 64-Pistol : 100-160mm
- C 、 6 inch Knife: 80-150mm
- D 、 Steel ball with 20mm diameter: 50-100mm

USE DOMAIN

Security detecting: Prevent taking contraband,
such as: knife, gun and so on.

Factory: Prevent the loss of valued objects

Education area: Prevent taking cheat-tool,
such as: telephone, electronic dictionary, and so on.

PRODUCT PICTURE:



It can be recharged. It needs 4-6 hours for charging. (the charger and rechargeable battery are ordered additional)
 .Rechargeable Battery Kit,Allows recharging without removing the battery. Includes environmentally friendly Cadmium free Ni-MH batteryand charger.

PRODUCT PICTURE:



Regulatory Information: Meets international security standards for airports, prisons, and special events,regulatory requirements for electromagnetic safety. Extensive research has found no information that would indicate Garrett products have adverse effects on pregnancy, medical devices (such as pacemakers) or magnetic recording media. However, directives by physicians and medical device manufacturers regarding metal detectors should be followed.

Contact us:

Shenzhen Unisec Technology Co.,Ltd
 Factory : 3/F Building A1, Fenghuang Industrial Park, Fenghuang Road, Pinghu
 Street Longgang District, Shenzhen China
 Tel: +086-0755-28793799 Fax: +086-0755-28791799
 Email:



Package:
 25pcs/carton
 Gross Weight for a carton:
 14kgs
 Carton Dimension:
 510(L) X 260(W) X 430(H) mm

www.uniqscan.com



MIROIRS D'INSPECTION

UV200 Under vehicle inspection mirror



Lightweight with adjustable handle Low 3.5" ground clearance

Rods and base painting: Outdoor painting
Rods color: Black

Available with flashlight, batteries and mounting bracket.

Mirror size: 12" / 30cm
Material of mirror: Acrylic

Carry: our product can fold the pull rod, fix the back one person can lift. It can be equipped with portable bag, which can be dismantled and collected when not used.

Aluminum handles extend from 42" to 51"6.
equipped with adjustable swivel for infinite adjustment.

3 wheels trolley
Available with tripod ball bearing caster wheels, allowing full range of motion with effortless maneuvering.



The Under Vehicle Search Mirror is portable inspection mirrors that are invaluable for looking into hard to see places in high security areas. Use wherever direct observation is not possible. The mirror is with either a Trolley or Hand-held system. Inspection mirrors are made of unbreakable acrylic mirror or high durable glass. Lightweight but sturdy fittings make using the inspections mirrors simple to use and the adjustable mirror head permits access to the most difficult of areas. Under Vehicle Search Mirror can view underneath. Used by enforcement agencies, engineering, building maintenance, armed services and security guards.



USE PLACE

- Inspection of car bottom explosives
- Family, garage, school
- Control area entrance inspection
- Military area entrance examination
- checkpoint, customs frontier

CHARACTERISTICS:

1. Mirror: 30 cm acrylic high strength against the broken mirror, convex 2 times magnified effect, is common with 1/2 weight of the glass mirror size, a certain toughness, invulnerability to breakage and safe, durable, brightness and glass mirror. Hard gluing and encircling can effectively prevent collision and damage to the mirror.
2. Grip: can reach the maximum depth to be detected vehicle and object, double bead shrapnel, plastic ring double insurance positioning, adopt high quality aluminum structure and many high strength processing, light, strong, beautiful. The surface is used in the outdoor paint treatment of dust-free workshop, long-term use of the color, no smell, no harm to the human body. Equipped with black foam handle, good grip, suitable for long operation.
3. Light source: LED flashlight. LED lights have long life, high brightness and waterproof, detachable function as working lamp. Customers can choose the appropriate light source according to their own usage characteristics. The fluorescent lamp model is not wet and used in rainy conditions.
4. Carry: our product can fold the pull rod, fix the back one person can lift. It can be equipped with portable bag, which can be dismantled and collected when not used.

USE

This model is specially designed for long time floor inspection, tables, chairs, bottom of the car and other objects that need to be searched.

According to the actual situation of the search, if the light is insufficient, please add the flashlight with the flashlight to supplement the light source so as to avoid the omission of the target object search.



DETAILS OF THE FIGURE:



A:roller



B:Small flashlight



C:handbag

A: Available with tripod ball bearing caster wheels, allowing full range of motion with effortless maneuvering.

B: Available with flashlight, batteries and mounting bracket.

C: our product can fold the pull rod, fix the back one person can lift. It can be equipped with portable bag.

PACKAGING:



Packaging: 5pcs in one carton, 60.5 x 33.5 x 45.5

Including:

1. The convex mirror
2. Swivel ball
3. The cleaners
4. A flashlight
5. Handbags



We attach importance to the packaging of products, because the mirror is a fragile item, and we will take every single thing seriously, every detail.

Shenzhen Unisec Technology Co.,Ltd

Factory : 3/F Building A1, Fenghuang Industrial Park,
Fenghuang Road, Pinghu Street Longgang District,
Shenzhen China

Tel: +086-0755-28793799 Fax: +086-0755-28791799

Email: